Cofoe

Stock Symbol: 301087

Make Your Healthcare
More Comfortable And Affordable

Cofoe Medical Technology Co., Ltd

Email: export@cofoe.com

Website: www.cofoe.com

ADD: No. 87, Section 1 of Huanbao East Road, Yuhua District,
410000 Changsha, Hunan, PEOPLE'S REPUBLIC OF CHINA

Our Mission

The word "Cofoe" is originated from comfortable and affordable. We are committed to making lives more comfortable through our affordable service and products.

About Us

Cofoe, founded in 2005, is an integrated company specializing in R&D, manufacturing, marketing and after-sales service of medical device.

With over 20 years of development, we have established 99 subsidiaries and 800 branches in China. The group is headquartered in Changsha, with 4 production sites in Changsha, Xiangyin, Nantong, Qidong covering more than 800,000 square meters. 4 R&D centers were set up in Changsha and Shenzhen with a team of 361 product owners and engineers dedicated to the development of health monitoring device, rehabilitation equipments, respiratory device, IVD and disposables. We have ISO13485, FDA 510(K), **MDR CE, IVDR CE.**

In 2021, Cofoe went public in Shenzhen with stock symbol 301087. In November, acquired Jerry Medical as our subsidiary.

In January 2025 , Cofoe aquired Shanghai hzpsa, and Humana Medical(HK) in June at the same year.

JOYOR HearingCare | Jerry medical 吉芮医疗 | 科源医疗 Keyuan Medical

Humana | HUAZHOU | 背背佳 babaka

Cofoe

Stock Symbol: 301087

4
R&D Centers
Based in Changsha, Shenzhen

4
Production Sites

99
Subsidiaries

640
Branches Office

361
R&D Team

200,000㎡
Logistic Center Area

5,000+
Employees

200,000
Serve Chain Pharmacies

800,000㎡
Factory Area



Cofoe

Stock Symbol: 301087

Milestone

2005

Hunan Keyuan Medical Equipments Ltd founded in Changsha,and then acquired Xingli, Kemai and Qiyuan.

2007

First branch company founded in Hangzhou, covering eastern China.

2008

Haohushi founded, extending to online retail.

2009

R&D and manufacturing base are founded.

2011

First domestic warehouse of medical equipments established in Changsha.

2012-2017

Branch companies founded in Guangzhou, Wuhan, Guiyang, Jinan, Beijing, Hangzhou, Nanjing, Chengdu, Hefei.

2018-2020

Sales keep climbing with high speed.

2021

IPO,listed in Shenzhen, In November, acquired Jerry Medical as our subsidiary.

2025

In January acquired **Shanghai hzspa,** in June acquired **Humana Medical (HK).**

Cofoe

Stock Symbol: 301087

Our Certificates





Global Partner Representatives



ACARE · believia For health · B-lab · dellamed · Dr. Senst

DMH · dr.Frei · esensa · femmto · GYLMED

НОВОКОНТ · K&I Knowledge and Innovation · KLMED · Moncare · impormedical

MEDIRON · mievida WELLNESS BEYOND MEDICINE · Maxcare · MÉRY GO · NOVAMED

NOVEL · ONEHEALTH Tensi · Orbit · PROCIRÚRGICA · Quantus

SAN·UP · SuKar Chek · SCANMED YOUR TRUSTED HEALTH GUARDIAN · VIVAMAX · ZIMMO

4 Major Manufacturing Bases

Cofoe New Headquarters & Manufacturing Base (Under Construction)



A1 R&D Center
A2 R&D Center
A3 Hearing Aids Production Site
A4 DME Production Site

B1 Health Monitoring Device Production Site
B2 Warehouse

C1 Disposable Production Site
C2 Health Monitoring Device Production Site
C3 Respiration Device Production Site
C4 IVD Production Site

D1 Staff Domitory
D2 Office
D3 Office
D4 Office







Changsha Factory

Site Area: **444,746.93 m²**
Main Scope of Production:
Diagnostics medical device and IVD products



Xiang Yin Factory

Site Area: **300,000 m²**
Main Scope of Production:
Disposable (Face mask, alcohol pads, band-aid etc.)
Durable medical equipment (Hospital bed, mobility aids, commode chair etc.)






Nantong Factory (Subsidiary: Jerry Medical)

Site Area: **34,000 m²**
Main Scope of Production:
Wheelchair





R & D TEAM
(**552** Engineers)

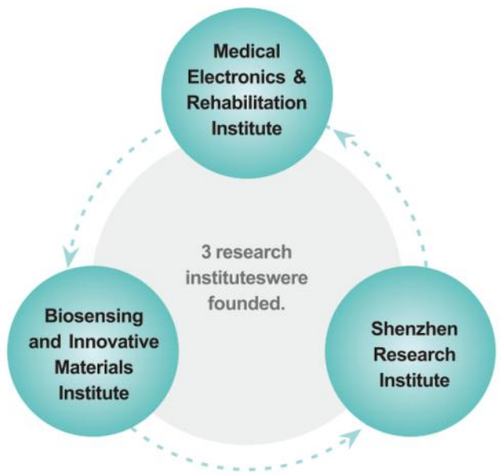

Biosensing and Innovative Materials Institute

Focus on R&D of IVD product series, intelligent portable healthcare monitoring series, and medical disposable products.

Medical Electronics & Rehabilitation Institute

Focus on hearing, rehabilitation device, respiratory support and life information detection.

Shenzhen Research Institute

Focus on the R&D of CGM.

QUALITY CONTROL



01 **DIAGNOSTICS** (1-26)
- Blood Pressure Monitor
- Infrared Thermometer
- Pulse Oximeter
- Fetal Doppler

02 **IVD** (27-40)
- Blood Glucose Meter and Test Strips
- HCG Pregnancy Test Kits
- HP Test Kits

03 **RESPIRATORY CARE** (41-50)
- Compressor Nebulizer
- Mesh Nebulizer
- Oxygen Concentrator
- CPAP & BPAP

04 **DME** (51-64)
- Wheelchair
- Nursing Bed
- Cane
- Walker

05 **DISPOSABLES & INCONTINENCE** (65-78)
- Ostomy Bag
- Adult Diaper
- Underpads



AFib Detection Blood Pressure Monitor

Why Atrial Fibrillation?

The risk of stroke is up to five times higher in people with AFib. This is concerning as much of this is preventable with good treatment However, many patients don't know that they have atrial fibrillation until it is too late.

AFib Detection BPM Seamlessly integrate early AFib detection into daily routine.

(Please note that the AFib detection is for informational only, final diagnosis only be confirmed by Electroncardliograr, if the AFib symbol appears, consult your physician)

Cofoe

Stock Symbol: 301087

Model: KF-67C/KF-65W



KF-67C



KF-65W

PRODUCT PARAMETERS		
Model	KF-67C, KF-65W	KF-67BP
Power	Dry battery	Built-in Rechargeable battery
Unit Dimension	108mm * 134mm *58mm	
LCD Dimension	81*88mm	
Display	White Backlight	
Weight	330g(Adapter not included)	
Memory Bank (Users)	96*4 Users	
Memory-average Function	Last 3 Readings	
Arm Cuff	23~33cm /22~42cm	
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg	
Pulse Accuracy	± 5%	
Packing	16pcs/CTN	
Carton size	43.8*28.5*35.5cm	
G.W.	10.05KGS	

AFib Detection

Bluetooth

Multiple Language Selection

WHO BP indicator

Cuff wrapping guide

Irregular heart beats detector

One touch Voice On/off

Body movement Indicator

Restart Reminder

Pulse rate indicator

4 Users *96 memory bank

Testing reminder

Cofoe
Stock Symbol: 301087

Model: KF-66DP

Unit Dimension	115mm * 135mm *83mm
LCD Dimension	89*91mm
Weight	335g (Adapter not included)
Power	Rechargeable Battery
Memory Bank (Users)	96*4 Users
Memory-average Function	Last 3 Readings
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Pulse Accuracy	± 5%
Packing	16pcs/CTN
Carton size	43.8*28.5*35.5cm
G.W.	10.05KGS



AFib Detection · Bluetooth · WHO BP indicator · lithium battery · Multiple Language Selection

Model: KF-65A / KF-65N

(without Afib) (with Afib)



AFib Detection · Arm Movement Indicator · Irregular Heartbeat Detection · Voice Prompt

Unit Dimension	140*110*81mm
LCD Dimension	80*60mm
Battery	4*AA Alkaline Baterries
Memory Bank (Users)	192* 2 Users
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %
Packing	16pcs/CTN
Carton size	43.8*27.5*35.5cm
G.W.	10.8KGS

Model: KF-65D / KF-65G

(without Afib) (with Afib)

Unit Dimension	107.6*139.5*60.9mm
LCD Dimension	67*77mm
Battery	4*AA Alkaline Baterries
Memory Bank (Users)	96*4 Users
Memory-average Function	Last 3 Readings
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %
Packing	16pcs/CTN
Carton size	43.8*27.5*35.5cm
G.W.	10.8KGS



AFib Detection · Bluetooth · WHO Indicator · Memory-average Function · Arm Movement Indicator · Irregular Heartbeat Detection · Negative LCD Display · Type-C charging port

Model: KF-65K

Unit Dimension	140*112*81mm
Display	LCD Screen, 3-Color Back Light
LCD Dimension	95* 66.50mm
Memory Bank (Users)	192* 2 Users
Battery	4*AA Alkaline Baterries
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %



Packing: 16pcs/CTN
Carton size: 43.8*27.5*35.5cm
G.W.: 10.8KGS

AFib Detection · WHO Indicator · Adjustable Time & Date · Voice Prompt · Low Battery Indicator · Arm Movement Indicator · Irregular Heartbeat Detection

Cofoe
Stock Symbol: 301087

BLOOD PRESSURE MONITOR



Model: KF-66EP

LCD Dimension	89*91mm
Unit Dimension	115mm*135mm*83mm
Weight	About 335g(Without adapter)
Arm Cuff	23~33cm/22~42cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Pulse rate detection range	40 to 199 Beats/Minute
Sensor Accuracy	±3mmHg
Pulse Accuracy	±5%
Last Reading	Yes
AVG	Last 3 average readings
Memory bank(Users)	192*2 Users
Charging Time	90-120 mins
Packing	16pcs/CTN
Carton size	43.8*28.5*35.5cm
G.W.	10.5KGS

Irregular Heartbeat Detection
Built-in Rechargeable Battery
Type-C charging port
Bluetooth
Voice Prompt
Memory-average Function
4.8 inch LCD With Backlight
lithium battery

Model: KF-65B

Unit Dimension	140*110*81mm
LCD Dimension	80*60mm
Battery	4*AA Alkaline Baterries
Memory Bank (Users)	192* 2 Users
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %
Packing	16pcs/CTN
Carton size	43.8*27.5*35.5cm
G.W.	10.8KGS



Low Battery Indicator
Arm Movement Indicator
Irregular Heartbeat Detection

Model: KF-65R

Unit Dimension	112*93*44mm
LCD Dimension	44*44mm
Battery	4*AAA Alkaline Baterries
Memory Bank (Users)	192* 2 Users
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %
Packing	30pcs/CTN
Carton size	39.5*36*33cm
G.W.	12.16 KGS



Low Battery Indicator
Arm Movement Indicator
Irregular Heartbeat Detection
WHO Indicator

Model: KF-65BG

Unit Dimension	112*93*44mm
LCD Dimension	56*56.3mm
Battery	4*AAA Alkaline Baterries
Memory Bank (Users)	192* 2 Users
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %
Packing	30pcs/CTN
Carton size	39.5*36*33cm
G.W.	12.16 KGS



Low Battery Indicator
Arm Movement Indicator
Irregular Heartbeat Detection
WHO Indicator



Model: KF-65IPLUS

Unit Dimension	123*165*92mm
Display	LCD Screen, 3-Color Back Light
LCD Dimension	88* 77mm
Memory Bank (Users)	192* 2 Users
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %
Packing	16pcs/CTN
Carton size	46*28.5*38.5cm
G.W.	11.2KGS

3-Color Backlight

Irregular Heartbeat Detection

Built-in Rechargeable Battery

Adjustable Time & Date

Model: KF-65E

Unit Dimension	140*105*62.6mm
Display	LCD Screen, 3-Color Back Light
LCD Dimension	86* 63mm
Battery	4*AA Alkaline Baterries
Memory Bank (Users)	192* 2 Users
Arm Circumference	23~33 cm/22~42 cm
Blood Pressure Measurement Range	SYS: 40 to 260 mmHg DIA: 20 to 240 mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 199 Beats/Minute
Pulse Accuracy	±5 %
Packing	16pcs/CTN
Carton size	43.8*27.5*35.5cm
G.W.	10.8KGS



Voice Prompt

Low Battery Indicator

Arm Movement Indicator

Irregular Heartbeat Detection

Standard Package



1. Blood Pressure Monitor
2. Cuff
3. Color Box
4. Storage Bag
5. User Manual
6. Batteries



Carry Case (Optional)



Arm Circumference



WRIST BLOOD PRESSURE MONITOR

Model: KF-75C

Unit Dimension	74.2*65.4*30.52mm
LCD Dimension	45.2* 34mm
Memory Bank	4*48
Wrist Circumference	12.5 ~ 20cm
Blood Pressure Measurement Range	SYS: 60~260mmHg DIA: 40~230mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 150 Beats/Minute
Pulse Accuracy	±5 %
Packing	40pcs/CTN
Carton size	44.5*35.8*20cm
G.W.	10.9KGS





Cofoe
Stock Symbol: 301087

Model: KF-75B

Unit Dimension	90.24*61.2*21.4mm
LCD Dimension	46*41.5mm
Memory Bank	192
Wrist Circumference	12.5 ~ 20cm
Blood Pressure Measurement Range	SYS: 60~260mmHg DIA: 40~230mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 150 Beats/Minute
Pulse Accuracy	±5 %
Packing	45pcs/CTN
Carton size	31.5*39*31cm
G.W.	11.5KGS









Model: KF-75DPLUS

Unit Dimension	75*60*23.42mm
Display	LCD Screen, 3-Color Back Light
LCD Dimension	41*37.8mm
Memory Bank	192*2 Users
Wrist Circumference	12.5 ~ 20cm
Blood Pressure Measurement Range	SYS: 60~260mmHg DIA: 40~230mmHg
Sensor Accuracy	±3 mmHg
Pulse Measurement Range	40 to 150 Beats/Minute
Pulse Accuracy	±5 %
Packing	40pcs/CTN
Carton size	54.5*37*28.4 cm
G.W.	12 KGS



INFRARED THERMOMETER

Age-in-Months Selection

Smart Fever Alerts Calibrated to Baby's Exact Month.

0–3 3–36 36+

Simply select baby's age, and get an instantly clearer, science-based fever assessment.

3-Color Backlight Guidance

Color Tells, Fever Alerts — Making Detection Simple & Scientific.

Age group	Green Normal	Orange Elevated	Red High Fever
0-3 month	35.8℃ - 37.4℃	/	＞37.4℃
3-36 month	35.4℃ - 37.6℃	37.6℃ - 38.5℃	＞38.5℃
＞36 month	35.4℃ - 37.7℃	37.7℃ - 39.4℃	＞39.4℃

Cofoe

Stock Symbol: 301087



Model: KF-HW-080CS

Core Pre-Heating Technology

- ✓ The probe is pre-warmed to eliminate temperature drop from the cold probe in the ear canal, ensuring unmatched accuracy.
- ✓ Pre-warmed to body temperature to minimize the cold sensation.

Battery-Free

- ✓ Type-C fast charging

Night Mode

- ✓ Gentle Light+Silent Care

50 Sets of Memory · 3-Color Backlight Display · Fast Measurement · LCD Digital Screen

Bluetooth · lithium battery · Gentle Light+ Silent Care · Power-Saving

FEATURE	SPECIFICATION
Measure Time	<2S
Memory Data	50sets
Color	Backlight with 3 different color:green,orange,red
Measurement Distance	1-3cm
Auto Power Off	≤ 30S
Power supply/Input	D.C. 3.7V(lithium battery)/7VA
Body Temperature Measure Range	32℃~43℃
Subject Temperature Measure Range	0℃~100℃
Packing	40pcs/CTN
Carton size	47.2*26*36cm
G.W.	6KGS

Cofoe
Stock Symbol: 301087

Model: KF-HW-60A



Core Projection and Positioning Technology

- Guided by projection technology, a small red flower blooms in light-gently pinning the perfect measurement spot on the center above the brow.
- Measurement distance: 1-5cm
- Visual Cue: Clear pattern at right distance, fuzzy if too far.

Core Scan Technology: High-Frequency, Continuous Readings.

- No more aiming struggles with a wriggling child.
- In scanning mode, it performs smart, continuous reads every 0.2 seconds. Within 5 seconds, the smart algorithm outputs the accurate temperature.
- Accurate, even in motion.

Award-Winning Design

- Proudly honored with the internationally recognized MUSE Design Award.

MUSE DESIGN AWARDS

FEATURE	SPECIFICATION
Measure Time	<2S
Memory Data	50sets
Color	3 Backlightt color: green,orange,red
Measurement distance	1-5cm
Auto Power Off	≤ 30S
Temperature Measure Range	32℃–43℃
Power supply	d.c.3v (2 sections of AAA battery)
Accuracy(Body Mode)	32.0°C ~ 34.9°C ± 0.3°C 35.0°C ~ 42.0°C ± 0.2°C 42.1°C ~ 43.0°C ± 0.3°C
Packing	40 pcs/CTN
Carton size	54.5*40*33cm
G.W.	6KGS





50 Sets of Memory
3-Color Backlight Display
Power-Saving
Gentle Light+ Silent Care
1 Second Measurement
LCD Digital Screen

Model: KF-HW-81C/KF-HW-81A(Blue tooth)

FEATURE	SPECIFICATION
Measure Time	<2S
Memory Data	50sets
Color	Backlight wiht 3 different color: green,orange,red
Measurement Distance	1-3cm
Auto Power Off	≤ 30S
Power supply/Input	D.C. 3.7V(2*AA Alkaline battery)/7VA
Body Temperature Measure Range	32℃~43℃
Subject Temperature Measure Range	0℃~100℃
Packing	40pcs/CTN
Carton size	47.2*26*36cm
G.W.	6KGS

Model: KF-HW-001

FEATURE	SPECIFICATION
Battery	DC 3V, 2*AAA Alkaline battery
Memory Data	50 sets
Measure Time	<2S
Temperature Measure Range	32°C-43°C
Measurement Distance	1-3cm
Auto Power Off	≤ 30S
Color	Backlight wiht 3 different color: green, orange, red
Packing	40pcs/CTN
Carton size	472*260*360mm
G.W.	6.40KGS





Model: KF-HW-002

FEATURE	SPECIFICATION
Measure Time	<2S
Memory Data	50sets
Color	3 Backlightt color: green,orange,red
Measurement distance	1-3cm
Auto Power Off	≤ 30S
Temperature Measure Range	32℃–43℃
Power supply	DC3v (2 sections of AAA battery)
Accuracy(Body Mode)	32.0°C ~ 34.9°C ± 0.3°C 35.0°C ~ 42.0°C ± 0.2°C 42.1°C ~ 43.0°C ± 0.3°C
Packing	36 pcs/CTN
Carton size	460*235*356mm
G.W.	6.40KGS

Model: KF-HW-003

FEATURE	SPECIFICATION
Measure Time	<2S
Memory Data	50sets
Measurement Distance	1 ~ 3cm
Auto Power Off	≤ 30S
Accuracy (Body Mode)	32.0°C ~ 34.9°C ± 0.3°C 35.0°C ~ 42.0°C ± 0.2°C 42.1°C ~ 43.0°C ± 0.3°C
Battery	DC3V, 2*AAA Alkaline Battery
Temperature Measure Range	32°C ~ 43°C
Packing	40pcs/CTN
Carton size	390*258*363mm
G.W.	5.80KGS







Model: KF-HW-004

FEATURE	SPECIFICATION
Measure Time	<2S
Memory Data	50sets
Measurement Distance	1 ~ 3cm
Auto Power Off	≤ 30S
Accuracy (Body Mode)	32.0°C ~ 34.9°C ± 0.3°C 35.0°C ~ 42.0°C ± 0.2°C 42.1°C ~ 43.0°C ± 0.3°C
Battery	DC3V, 2*AAA Alkaline Battery
Temperature Measure Range	32°C ~ 43°C
Packing	50pcs/CTN
Carton size	365*235*325mm
G.W.	7.00KGS





Model: KF-HW-005

FEATURE	SPECIFICATION
Display	LCD dispaly
Measure Time	<2s
Memory Data	50 sets
Measurement Distance	1-3cm
Auto Power Off	≤ 30S
Accuracy (Body Mode)	32.0°C ~ 34.9°C ± 0.3°C 35.0°C ~ 42.0°C ± 0.2°C 42.1°C ~ 43.0°C ± 0.3°C
Battery	DC3V, 2*AAA Alkaline Battery
Measurement Range	32°C ~ 43°C Fahrenheit and celsius are switchable
Packing	40pcs/CTN
Carton size	353*280*323mm
G.W.	5.80KGS



DIGITAL THERMOMETER

Model: KF-TWJ-10AS ／KF-TWJ-08AS

FEATURE	SPECIFICATION
Accuracy	±0.1°C
Display	LCD , 3-color backlight
Battery	3V DC. button battery (Cr2023)
Response time	≤15s
Bluetooth	Yes
Memory Bank	10 sets
Dust and waterproof grade	IPX2



Cofoe
Stock Symbol: 301087

Model: KF-TWJ-004

FEATURE	SPECIFICATION
Range	32.0°C~42.9°C
Accuracy	±0.1°C, 35.5°C~42.0°C
Display	LCD
Battery	One 1.5 V DC.button battery(size LR41)
Storage and transportation condition	Temperature: -25°C~55°C(-13°F~131°F) Relative humidity: 15%RH~85%RH Atmospheric pressure: 50kPa~106kPa
Applied part	Digital Thermometer surface
Mode of operation	Direct mode



Packing: 600pcs/CTN
Carton size: 52*30.5*50.5cm
G.W : 20KGS



Packing: 600pcs/CTN
Carton size: 52*30.5*50.5cm
G.W : 20KGS

Model: KF-TWJ-009

FEATURE	SPECIFICATION
Range	32.0°C~42.9°C
Accuracy	±0.1°C, 35.5°C~42.0°C
Display	LCD
Battery	One 1.5 V DC. button battery(size LR41)
Storage and transportation condition	Temperature: -25°C~55°C(-13°F~131°F) Relative humidity: 15%RH~85%RH Atmospheric pressure: 86kPa~106kPa
Applied part	Digital Thermometer surface
Mode of operation	Direct mode

PULSE OXIMETER



Cofoe

Stock Symbol: 301087

Model: OHT80



Automatic Measurement

Accurate Measurement

Auto Power-Off

PRODUCT PARAMETERS	
Detecting Item	Blood oxygen saturation, pulse rate
Display	LED
Range of Pulse Oxygen Measurement	35%~100%
Range of Pulse Rate Measurement	30bpm~250bpm
Blood Oxygen Resolution	1%
Blood Oxygen Accuracy	±3%(70%~100%)
Pulse Rate Resolution	1bpm
Pulse Rate Accuracy	±3bpm
Battery	DC3V, 2*AAA Alkaline Battery
Energy Consumption	40mA
Packing	100pcs/CTN
Carton size	43.5*36*22cm
G.W.	8.5KGS

Cofoe
Stock Symbol: 301087

Model: OXH88



FEATURE	SPECIFICATION
Function	Blood oxygen saturation, pulse rate and perfusion index
Display	0.96 inch OLED, 6 display interfaces and 4 rotation directions
Range of Blood Oxygen Measurement	35% ~ 100%
Perfusion Index	0.3-20
Range of Pulse Rate Measurement	30bpm~250bpm
Blood Oxygen Resolution	1%
Blood Oxygen Accuracy	± 3%(70% ~ 100%)
Pulse Rate Accuracy	± 3bpm
Battery	DC3V, 2*AAA Alkaline Battery
Energy Consumption	50mA
Packing	100pcs/CTN
Carton size	43.5*36*22cm
G.W.	8.5KGS

Automatic Measurement

Accurate Measurement

Rotating Smart Screen

Dual Color LED Screen

Heart Bar Graph

Waveform	Meaning*
	Normal Heart Rate
	Irregular Heart Rate
	Weak Heart Rate



Model: OXH78

FEATURE	SPECIFICATION
Function	Blood oxygen saturation, pulse rate and perfusion index
Display	0.96 inch OLED
Dimension	58mm*34mm*32mm
Blood Oxygen Range	35% ~ 100%
Perfusion Index	0.3 ~ 20
Blood Oxygen Accuracy	±3% (70%-100%)
Pulse Rate Range	30bpm ~ 250bpm
Pulse Rate Accuracy	±3bpm
Temperature	5°C ~ 40°C
Packing	100pcs/CTN
Carton size	43.5*36*22cm
G.W.	8.5KGS



One-Tap Activation

Rotating Smart Screen

Compact & Portable



Model: OHT60

FEATURE	SPECIFICATION
Function	Blood oxygen saturation, pulse rate
Display	LED
Dimension	58mm*34mm*35mm
Blood Oxygen Range	35% ~ 100%
Blood Oxygen Accuracy	±3% (70% ~ 100%)
Pulse Rate Range	30bpm~250bpm
Pulse Rate Accuracy	±3bpm
Temperature	5°C ~ 40°C
Packing	100pcs/CTN
Carton size	43.5*36*22cm
G.W.	8.5KGS



All-in-One Design

Compact and wireless design makes it easy to carry and use.

Intelligent Noise Cancellation for Optimal Sound

3 processes are perormed through software algorithms to avoid whistling and reduce noise

Highly Sensitive Probe

3.0 Mh probe for accurate detection of the fetal heat rate during early gestation.

Clinically Validated for Accuracy and Reliability

Model	HB-2001S、HB-2001SA (Bluetooth) HB-2003S、HB-2004S (Bluetooth)
Power Supply	DC 5V
Screen	LCD, Negative Display
Operation Mold	Pulse wave
Working Frequency	3.0 MHz
FHR Measuring Range	60-240bpm
Sensitivity	≥90dB
Water-proof Rating	IP22
Sound Output	In-built speaker

Cofoe
Stock Symbol: 301087

HB-2003S, HB-2004S (Bluetooth)



Advanced Split, Portable Design.

Detachable Display Screen--
Enables easy viewing,
allowing users to read fetal heartbeat data from up to 20 meters away.

Magnetic Contact Point



Charging Indicator of Main Unit
(Can work with rechargeable or non-rechargeable battery)

Probe

Probe Cover

Pulse Wave Technology

Faster and easier to locate the best position of fetal heartbeat



Pulse Wave



Efective area=100% Fullarea



Continuous Wave



Effective area=50% Full area

Instruction to Find the Fetal Heart

Signal bar indicates the distance to the fetal heart



No signal



around 2cm



< 1cm



Right fetal position


Cofoe
Stock Symbol: 301087



HB-1003S HB-1005S HB-1003SA HB-1005SA

Main Interface Display Content and Explanation

Digital Mode

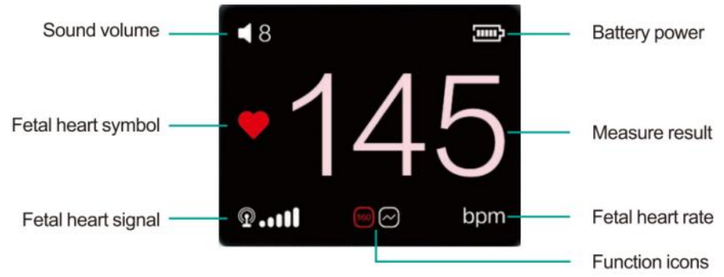

Curve Mode



Product Features



Two Modes

1. Listen with earphone
2. Listen by sound amplification

Hi-Fi Speaker

Low power consumption
adjustable volume





AUTO OFF


Auto off in 90s without operation
(Please unplug the probe after shutting down)

PRODUCT PARAMETERS				
Model	HB-1003S	HB-1005S	HB-1003SA	HB-1005SA
Screen	LCD	TFT	LCD	TFT
Display Mode	Digital FHR	Digital FHR & waveform	Digital FHR	Digital FHR & waveform
Battery	2*AA Batteries		2*AA batteries/2*NiMH rechargeable batteries (1300mA/h)	
Ultrasound Frequency	2 MHz			
Measurement Range	60 beats /min ~240 beats /min			
Error	± 2beats/min			
Packing	32pcs/CTN			
Carton size	47*42*33cm			
G.W.	11KGS			
Automatic shutdown within 90s without operation				



BLOOD GLUCOSE METER

Wide hematocrit range of 10% to 70% allows you to care for higher acuity patients, newborns and pregancy.

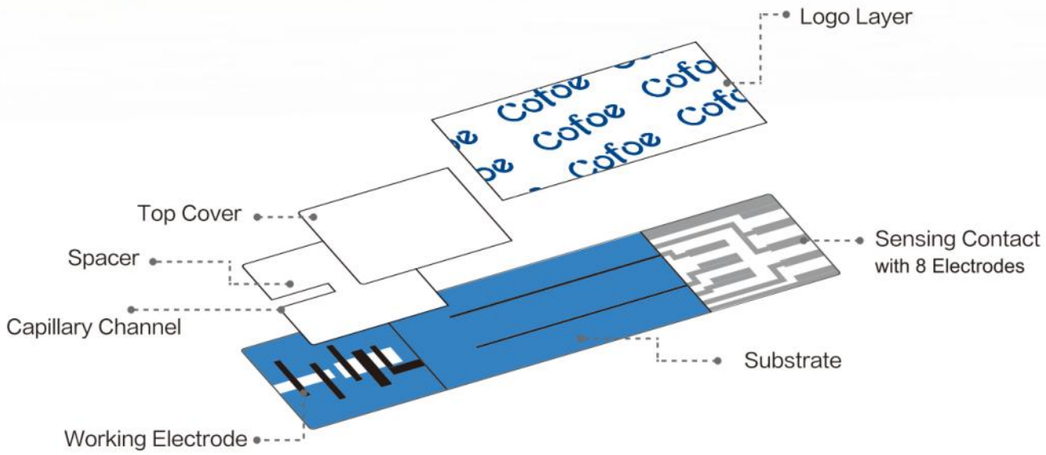

Cofoe

Stock Symbol: 301087

Model: CGH30

FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
Product Size	91*60*22mm
Display	LCD
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	300tests
Averaging (Days)	7, 14, 28 ,90
Unit of Measurement	Switchable (mmol/L & mg/dL)
Battery	2*AAA Alkaline batterries
HCT	10%-70%
AST	Palm, forearm, calf, upper arm, thigh

No Coding

HCT
HCT 10%-70%

AST
Alternative Sites Testing

Ketone Warning

Bluetooth



Packing: 60 BOXES
Carton size: 47.5*36*36.3CM
G.W.: 11 KGS

Model: CGH210

FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
Product Size	53.8*92.1*19.6mm
Display	LCD
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	500tests
Averaging (Days)	7, 14, 28 ,90
Unit of Measurement	Switchable (mmol/L & mg/dL)
Battery	2 x 3V button batteries
HCT	10%-70%
AST	Palm, forearm, calf, upper arm, thigh

NEW

No Coding

HCT
HCT 10%-70%

AST
Alternative Sites Testing

Ketone Warning

Bluetooth



Packing: 60 BOXES
Carton size: 47.5*36*36.3CM
G.W.: 11 KGS

Cofoe
Stock Symbol: 301087

Model: CGH310

FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
Product Size	53.8*92.1*19.6mm
Display	LCD
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	500 tests
Averaging (Days)	7, 14, 28 ,90
Unit of Measurement	Switchable (mmol/L & mg/dL)
Battery	2 x 3V button batteries
HCT	10%-70%
AST	Palm, forearm, calf, upper arm, thigh



No Coding
HCT
HCT 10%-70%
AST
Alternative Sites Testing
Ketone Warning
Bluetooth

Packing: 60 BOXES
Carton size: 47.5*36*36.3CM
G.W.: 11 KGS

Model: KF-B02

FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
Product Size	76.0*53.4*16mm
ISO Compliance	ISO 15197:2015
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	512 tests
Unit of Measurement	Pre-set to measure in mmol/L or mg/dL
Battery	1*Button battery
Auto Off Time	3 min
Packing	66pcs/CTN
Carton size	47.5*36*36.3cm
G.W.	7.5KGS





No Coding
Strip Ejection Design
AC/PC Marker
Light Indicator
5S Test Time

Packing: 66pcs/CTN
Carton size: 47.5*36*36.3cm
G.W.: 8. 2KGS

Model: KF-B12

FEATURE	SPECIFICATION
Enzyme	GDH-FAD
Product Size	83.9*55.3*16.1mm
ISO Compliance	ISO 15197:2015
Display	LCD
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	400 tests
Averaging (Days)	7, 14, 28
Unit of Measurement	Switchable (mmol/L & mg/dL)
AC/PC Marker	Yes
Battery	1 * Button battery
Auto Off Time	3 min



Rechargeable
Strip Ejection Design
AC/PC Marker

Packing: 66pcs/CTN
Carton size: 47.5*36*36.3cm
G.W.: 10.5KGS

Model: KF-A04

FEATURE	SPECIFICATION
Enzyme	**GOD**
ISO Compliance	ISO 15197:2015
Product Size	90.0*63.5*18.0mm
Display	LCD backlight screen
Blood Sample	1μl
Measurement Time	7s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	512 tests
Averaging (Days)	7, 14, 28
Unit of Measurement	Switchable (mmol/L & mg/dL)
AC/PC Marker	Yes
Voice Prompt	Yes
Battery	3.7V lithium battery
Auto Off Time	3 min

Cofoe
Stock Symbol: 301087

Model: KF-B06

FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
ISO Compliance	ISO 15197:2015
Product Size	61.0*90.3*24.0mm
Display	LCD
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	512 tests
Averaging (Days)	7, 14, 28
Unit of Measurement	Switchable (mmol/L & mg/dL)
AC/PC Marker	Yes
Battery	2*AAA Alkaline batterries
Auto Off Time	3 min



Packing: 66pcs/CTN
Carton size: 47.5*36*36.5cm
G.W.: 10.2KGS

Model: KF-A08

FEATURE	SPECIFICATION
Enzyme	**GOD**
ISO Compliance	ISO 15197:2015
Product Size	90.5*56.5*20.0mm
Display	LCD backlight screen
Blood Sample	1μl
Measurement Time	7s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	512 tests
Averaging (Days)	7, 14, 28
Unit of Measurement	Switchable (mmol/L & mg/dL)
AC/PC Marker	Yes
Voice Prompt	Yes
Battery	3.7V lithium battery
Auto Off Time	3 min



Packing: 66pcs/CTN
Carton size: 47.5*36*36.5cm
G.W.: 10.5KGS



Packing: 66pcs/CTN
Carton size: 47.5*36*36.5cm
G.W.: 10.2KGS

Model: KF-B10

FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
Product Size	61.0*90.3*24.0mm
Display	LCD
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	512 tests
Averaging (Days)	7, 14, 28
Unit of Measurement	Switchable (mmol/L & mg/dL)
AC/PC Marker	Yes
Voice Prompt	Yes
Battery	2*AAA Alkaline batterries
Auto Off Time	3 min



Packing: 66pcs/CTN
Carton size: 47.5*36*36.5cm
G.W.: 10.2KGS

Model: GKF-B01

FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
ISO Compliance	ISO 15197:2015
Product Size	89.8*60.7*24.5mm
Display	LCD
Blood Sample	0.8μl
Measurement Time	5s
Measuring Range	1.1mmol/L ~ 33.3mmol/L
Memory Capacity	512 tests
Averaging (Days)	7, 14, 28
AC/PC Marker	Yes
Voice Prompt	Yes
Battery	2*AAA Alkaline batterries
Auto Off Time	3 min

Blood Glucose Test Strip



Enzyme Type	GOD
Sample Size	1 μL
Reaction Time	7 seconds
Measurement Range	20 ~ 600 mg/dL (1.1 ~ 33.3 mmol/L)
Hematocrit Range	30% - 55%
Precision	± 15 mg/dL if < 100 mg/dl; ±15% if ≥ 100 mg/dL SD < 7.7 mg/dL (0.4 mmol/L) at < 100 mg/dL (5.55 mmol/L);
Accuracy	CV < 7.5% at ≥100 mg/dL (5.55 mmol/L)
Package	Vial pack / Single foil pack



Enzyme Type	GDH-FAD
Sample size	0.8 μL
Reaction time	5 seconds
Measurement Range	20 ~ 600 mg/dL (1.1 ~ 33.3 mmol/L)
Hematocrit Range	30% -55%
Precision	± 15 mg/dL if < 100 mg/dl; ±15% if ≥ 100 mg/dL SD < 7.7 mg/dL (0.4 mmol/L) at < 100 mg/dL (5.55 mmol/L);
Accuracy	CV < 7.5% at ≥100 mg/dL (5.55 mmol/L)
Package	Vial pack / Single foil pack



Enzyme Type	GDH-FAD
Sample size	0.8 μL
Reaction time	5 seconds
Measurement Range	20 ~ 600 mg/dL (1.1 ~ 33.3 mmol/L)
Hematocrit Range	10% - 70%
Precision	± 15 mg/dL if < 100 mg/dl; ±15% if ≥ 100 mg/dL SD < 7.7 mg/dL (0.4 mmol/L) at < 100 mg/dL (5.55 mmol/L);
Accuracy	CV < 7.5% at ≥100 mg/dL (5.55 mmol/L)
Package	Vial pack / Single foil pack

Standard Package



1 Color Box

2 Blood Glucose Meter

3 Lancing Device

4 Storage Bag

5 Test Strip Package

6 Test Strips Container

7 Lancet



Carry Bag (Optional)



Plastic Box (Optional)



3-in-1 Multi-functional Monitoring System

Cofoe

Stock Symbol: 301087

Model: GUT01 / GUT02 / GUT03



FEATURE	SPECIFICATION
Enzyme	**GDH-FAD**
Product Size	91*60*22mm
Display	LCD
Battery	2*AAA Alkaline batterries
Auto Off Time	3 min
Packing	66pcs/CTN
Carton size	47.5*36*36.3cm
G.W.	10.2KGS

Automatic Identification test strips

Glucose Averaging

Voice Prompt

Strip Ejection Design

	Blood Glucose	Cholesterol	Uric Acid
Test Range	1.1~33.3mmol/L (20~600mg/dL)	2.6~10.4mmol/L (100~400mg/dL)	179~1190μmol/L (3~20mg/dL)
Storage Capacity	600	600	600
Test Time	5s	75s	15s
Sample Volume	0.8μl	2.5μl	1.2μl
Averaging (Days)	7, 14, 28	/	/



GLU CHOL UA



2-in-1 Multi-functional Monitoring System

Only and Pioneer in the Market

2-in-1 Strip for GLU & UA Monitoring
The most cost-efficient and convenient way to manage your wellness.

High Accuracy
ISO Compliance: EN ISO 15197:2015.

Large LCD Screen

Only 1 Drop of Blood Required
In 10s with only 2.4 µL blood sample, measure glucose and uric acid at the same time.

Hematocrit Compensation
Increasing accuracy for wide HCT range patients, such as new born and pregnancy.

Code free
Code Free for Easy Operation

Second-Chance Sampling within 6 Seconds

Cofoe
Stock Symbol: 301087

Model: TGU200-C

FEATURE	SPECIFICATION
Product Size	54.1*100.4*20.2mm
LCD Size	39*50mm
Battery	2*3V button battery
Low Battery Indicator	Yes
Voice Prompt	Beep alert
Auto Shut-off	3min
Blood Sample	2.4µl
Measurement Time	10s
Memory Capacity	600



	GLU	UA
Measurement Range	1.1~33. 3mmol/L(20~600mg/dL)	180~1190µmol/L(3~20mg/dL)
Measurement Accuracy	EN ISO 15197:2015	±15% if > 4.95mg/dL ±0.75mg/dL if ≤ 4.95mg/dL
Measurement Precision	SD<7.7mg/dL if <100mg/dL CV<7.5% if ≥100mg/dL	CV<7.5% if > 4.95mg/dL SD<0.667mg/dL if ≤ 4.95mg/dL



Button Battery



Strip Ejector



1 Strip 1 Blood Required



HCG PREGNANCY TEST KITS



Strip



Midstream



Cassette

5 mins

99% Accurate

More Convenient

More Hygienic


Cofoe

Stock Symbol: 301087

HELICOBACTER PYLORI RAPID TEST

- Ready-to-use test kit
- Available in kit sizes of 5 and 50 tests
- Results ready in 3 min
- Storage in room temperature






1 Use the toothpick at 45 degree to collect interdental tartar.



2 The tip of toothpick should be scraped against the surface of tooth




3 Pinch the right edge of the test strip and uncover the self-adhesive test strip to the dotted line.

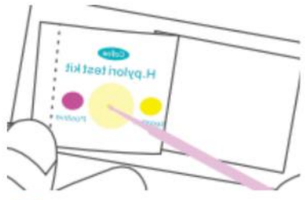

4 Place the tartar collected from the interdental brush in the center of the yellow test strip.



5 The self-adhesive test strip is compounded on the backing paper, so that the test strip with tartar is closely combined with the backing paper.

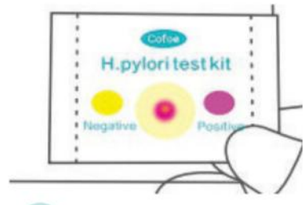

6 Stand at room temperature and observe the color change within 3 minutes. If the margin of the tartar is purple, it is positive. No color change is negative.



RESPIRATORY CARE

COMPRESSOR NEBULIZER

Model: KF-WHQ-06

FEATURE	SPECIFICATION
Noise	≤60dB
Nebulization Efficiency	≥0.25mL/min
Working Pressure	60kPa ~ 150kPa
Working Airflow	≥5L/m
Nebulization Capacity	8ml
MMAD	Model B Nebulization Cup, 3μm±25% Model D Nebulization Cup,2.5μm±25%
Residual amount	≤0.5mL
Working TEMP	10°C ~ 40°C(50°F ~ 104°F)
Storage TEMP	-20°C ~ 55°C(-4°F ~ 131°F)
Working Humidity	≤80% RH
Storage Humidity	≤90% RH
Accessories	Mask, mouthpiece, nebulization cup, 5 filters, air tube.



Fast heat Dissipation

Adjustable Atomization

Less Drug Residual

Cofoe

Stock Symbol: 301087

Model: KF-WHQ-07

FEATURE	SPECIFICATION
Noise	≤60dB
Nebulization Efficiency	≥0.25mL/min
Working Pressure	60kPa ~ 150kPa
Working Airflow	≥5L/m
Nebulization Capacity	8ml
MMAD	Model B Nebulization Cup, 3μm±25% Model D Nebulization Cup,2.5μm±25%
Residual amount	≤0.5mL
Working TEMP	10°C ~ 40°C(50°F ~ 104°F)
Storage TEMP	-20°C ~ 55°C(-4°F ~ 131°F)
Working Humidity	≤80% RH
Storage Humidity	≤90% RH
Accessories	Mask, mouthpiece, nebulization cup, 5 filters, air tube.



Fast heat Dissipation

Adjustable Atomization

Less Drug Residual



Fast heat Dissipation

Adjustable Atomization

Less Drug Residual

Model: KF-WHQ-03

FEATURE	SPECIFICATION
Noise	≤60dB
Nebulization Efficiency	≥0.25mL/min
Working Pressure	60kPa ~ 150kPa
Working Airflow	≥5L/m
Nebulization Capacity	8ml
MMAD	Model B Nebulization Cup, 3μm±25% Model D Nebulization Cup,2.5μm±25%
Residual amount	≤0.5mL
Working TEMP	10°C ~ 40°C(50°F ~ 104°F)
Storage TEMP	-20°C ~ 55°C(-4°F ~ 131°F)
Working Humidity	≤80% RH
Storage Humidity	≤90% RH
Accessories	Mask, mouthpiece, nebulization cup, 5 filters, air tube.



KF-WHQ-01



KF-WHQ-02

FEATURE	SPECIFICATION	FEATURE	SPECIFICATION
Noise	≤60dB	Residual amount	≤0.5mL
Nebulization Efficiency	≥0.25mL/min	Working TEMP	10°C ~ 40°C(50°F ~ 104°F)
Working Pressure	60kPa ~ 150kPa	Storage TEMP	-20°C ~ 55°C(-4°F ~ 131°F)
Working Airflow	≥5L/m	Working Humidity	≤80% RH
Nebulization Capacity	8ml	Storage Humidity	≤90% RH
MMAD	Model B Nebulization Cup, 3μm±25% Model D Nebulization Cup,2.5μm±25%	Accessories	Mask, mouthpiece, nebulization cup, 5 filters, air tube.
Packing	8pcs/CTN	Carton size	62*43.5*27cm
G.W.	12.32KGS		

- Model B Nebulization Cup, 3μm±25%



Face Mask Fixing Band | Filter | Mouthpiece | Air Tube | Kid Mask | Adult Mask | Medication Cup

- Model D Nebulization Cup,2.5μm±25%



Face Mask Fixing Band | Filter | Mouthpiece | Air Tube | Kid Mask | Adult Mask | Medication Cup

Cofoe
Stock Symbol: 301087

Model: KF-WHQ-05,KF-WHQ-08

FEATURE	SPECIFICATION
Power	AC 120V, 60Hz or 220V, 50Hz
Noises	≤60dB
Nebulization efficiency	≥0.25ml/min
Working Pressure	0kPa~150kPa
Working Airflow	≥5L/m
Nebulization Capacity	8ml
MMAD	Model B Nebulization Cup, 3μm±25% Model D Nebulization Cup,2.5μm±25%
Residual amount	≤0.5mL
Working TEMP	10°C-40°C (50°F~104°F)
Storage TEMP	-20°C~55°C (-4°C~131°C)
Storage Work Humidity	≤90%RH丨≤80%RH
Package	8pcs /CTN
CTN size	62*43.5*27cm
G.W.	12.8KGS

Fast Heat Dissipation | Adjustable Atomization | Less Drug Residual | Cartoon Shape



KF-WHQ-05



KF-WHQ-08



Model: D20A

FEATURE	SPECIFICATION
Noise	≤50dB
Dimension	150*130*70mm
Nebulization Efficiency	≥0.2ml/min
Working Airflow	≥5L/m
Nebulization Capacity	8ml
MMAD	3μm
Input power	120~240V, 50/60Hz
Output	12V ⎓ 2A
Work Time	30min ON/20min OFF
Working Pressure	60kPa ~ 150kPa
Working Environment	5°C ~ 40°C(41°F ~ 104°F), ≤80% RH
Storage Environment	-20°C ~ 55°C(-4°F ~ 131°F), ≤90% RH
Accessories	Mask, mouthpiece, nebulization cup, 5 filters, air tube.



KF-WHQ-801&KF-WHQ-811 Series

Upgraded model

- User-replaceable Vibrating Mesh Plate
- Blue-tooth Connection
- Visual Screen Display
- Adjustable Nebulization Rate
- Optional Dry Battery and Rechargeable Battery



Cofoe

Stock Symbol: 301087

MESH NEBULIZER



KF-WHQ-601B



KF-WHQ-603B

Model	KF-WHQ-603BS KF-WHQ-601BS
Low nebulization rate	≥ 0.18 mL/min
Medium nebulization rate	≥ 0.20 mL/min
High nebulization rate	≥ 0.30 mL/min

FEATURE	SPECIFICATION
Adapter	DC 5V,1A
Charger	Type-C
Charging Time	2-3 hours
Noise	≤35dB
Capacity	8ml±0.5ml
Nebulization Efficiency	≥0.3ml/min
Working Frequency	110kHz
Residual amount	≤0.1mL
MMAD	The proportion of mist particles less than 5μm is > 60%, the median particle size is 4.5μm ±25%
Packing	40box/CTN
Carton size	70*36*40cm
G.W.	11KGS



Adult Face Mask



Kid Face Mask



Nebulizer



Product Package

Mouthpiece



Type-C cable



User Manual



Label

Cofoe
Stock Symbol: 301087

OXYGEN CONCENTRATOR



Model: KF02-5YW

- **High-definition large screen with backlight display**
- **Voice broadcast (optional)**
- **7*24 hours continuous supply**
- **Real-time monitoring of oxygen concentration**
- **Eight-layer purification filter**
- **Smart alarm alerts:**
  - Low oxygen concentration alarm
  - Power failure alarm
  - Compressor malfunction alarm
  - Over-temperature alarm
  - Low oxygen flow alarm

FEATURE	SPECIFICATION
Input Voltage	AC220V
Input Frequency	50Hz
Average Power Consumption	400VA
Dimensions	42*28*55cm
Weight	16.5kg
Oxygen Concentration	93%±3%(V/V)
Liter Flow	0.6~5L/min
Sound Level	≤60dB（A）
OPI (Oxygen Percentage Indicator) Alarm Levels	Low oxygen: ≤82%, very low oxygen: ≤50%
Operating Altitude	≤1828m
Accessories	Filter, Disposable oxygen inhalation tube, Atomization kit, Humidifier cup assembly

Model: KF02-3YW

FEATURE	SPECIFICATION
Input Voltage	AC220V
Input Frequency	50Hz
Average Power Consumption	400VA
Dimensions	42*28*50cm
Weight	12.5kg
Oxygen Concentration	93%±3%(V/V)
Liter Flow	0.6~3L/min
Sound Level	≤60dB（A）
OPI (Oxygen Percentage Indicator) Alarm Levels	Low oxygen: ≤82%, very low oxygen: ≤50%
Operating Altitude	≤1828m
Accessories	Filter, Disposable oxygen inhalation tube, Atomization kit, Humidifier cup assembly



- **High-definition large screen with backlight display**
- **Voice broadcast (optional)**
- **7*24 hours continuous supply**
- **Real-time monitoring of oxygen concentration**
- **Eight-layer purification filter**
- **Smart alarm alerts:**
  - Low oxygen concentration alarm
  - Power failure alarm
  - Compressor malfunction alarm
  - Over-temperature alarm
  - Low oxygen flow alarm

CPAP & BPAP

Heating and humidifying

Auto ON/OFF

Multi function selection

Intelligent prompt

Sleep report

Cofoe

Stock Symbol: 301087

C9 series

CPAP



Model:AR120

BPAP



Model:BR125

Model	AR120	BR125
Treatment mode	CPAP, APAP	CPAP, S, T, ST
Treatment pressure	4-20cmH_2O is applicable to most users	4-25cmH_2O is applicable to most users
Pressure unit	cm$H_2$0/hpa	
Dimension	277mm x 123mm x 161mm	
Product weight	About 1.42kg	
Normal operating conditions of the equipment	a) Ambient temperature range: 5℃~35℃ b) Relative humidity range: ≤80% c) Air pressure range: 86~106kPa d) Input power supply voltage: AC 220V 50HZ	









Cofoe
Stock Symbol: 301087

C10 series



Model: AR220



Model: BR230

Model	AR220	BR230
Treatment mode	CPAP, APAP	CPAP, APAP, S, Auto S, T, ST
Treatment pressure	4-20cmH_2O is applicable to most users	4-30cmH_2O is applicable to most users
Pressure unit	cm$H_2$0/hpa	
Dimension	271x158x124mm	
Product weight	About 1.7kg	
Normal operating conditions of the equipment	a) Ambient temperature range: 5℃~35℃ b) Relative humidity range: ≤80% c) Air pressure range: 86~106kPa d) Input power supply voltage: AC 220V 50HZ	










AR120 MINI



AR120 MINI

FEATURE	SPECIFICATION
Treatment mode	CPAP, APAP
Treatment pressure	4-20cmH_2O is applicable for the most users
Pressureunit	cm$H_2$0/hpa
Noise	⩽30dB
Dimension	159mm x 85mm x 51mm
Product weight	293.5g
Normal operating conditions of the equipment	a) Ambient temperature range: 5℃~35℃ b) Relative humidity range: ≤80% c) Air pressure range: 86~106kPa d) Input power supply voltage: AC220V frequency: 50HZ

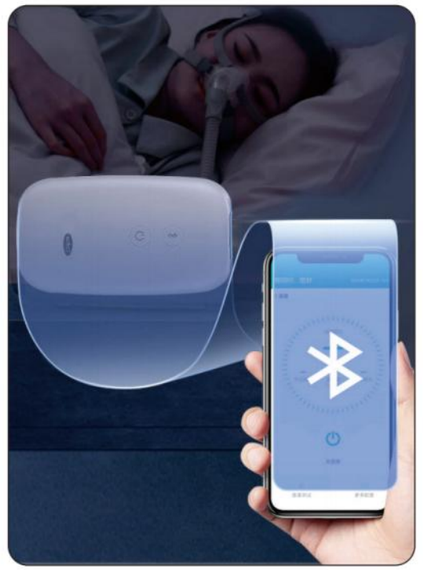







WHEELCHAIR

Model: KF-SYIV-001

FEATURE	SPECIFICATION
Material	Steel, liquid coated
Size	16"(40cm) 18"(45cm) 20"(50cm) 8*1"PVC front wheels with steel fork 24" rear wheels with PU tire
Weight Capacity	125kgs
Carton size	82*27*93cm
N.W	18KGS



- Nylon seat and back
- Desk armrest, PVC arm pad,plastic panel
- Swing away legrest

Cofoe
Stock Symbol: 301087

Model: KF-SYIV-003

FEATURE	SPECIFICATION
Pediatric Model	Steel, liquid coated
Size	16"(40cm) 18"(45cm) 20"(50cm) 8*1"PVC front wheels with steel fork 24" rear MAG wheels with PU tire
Weight Capacity	125kgs
Carton size	82*27*93cm
N.W	18KGS



- Vinyl seat and back
- Desk removable armrest, PVC arm pad,plastic panel
- Swing away legrest



Model: KF-SYIV-005

FEATURE	SPECIFICATION
Frame Material	Steel, liquid coated
Overall Length (With Anti Tippers)	1075mm
Overall Width	685mm
Overall Height	960mm
Folded Size	780mm*260mm*785mm
Package Dimension	810mm*275mm*815mm
Net Weight	18kgs
Gross Weight	21.6kgs
Rear Wheel	24"
Front Wheel	8 "
Max Loading Capacity	125kgs

- Nylon seat and back
- Desk armrest, PVC arm pad,plastic panel
- Swing away legrest

Model: KF-SYIV-012

FEATURE	SPECIFICATION
Frame Material	Steel frame, chrome-coated
Seat Width	46CM
Carton size	79*20*79CM
G.W.	16,44KGS
N.W.	13,72KGS



- Powder coating
- 8" front casters, 24" rear wheels
- Half foldable backrest, full length PVC armrest
- Detachable footrest, hand Brake and safety belt



Model: KF-SYIV-100

FEATURE	SPECIFICATION
Pediatric Model	Aluminum frame liquid coated
Size	16"(40cm) 18"(45cm) 20"(50cm) 8*1.25" PU front wheels with Alu fork 24" QR rear wheels with PU tire Alu handrim
Weight Capacity	125kgs
Folding Size	81*32*75cm
Package Size	82*33.5*78.5cm
Net Weight	16.4 kgs
Gross Weight	19 kgs

- Nylon seat and back
- Slope armrest, PU arm pad, plastic panel
- Swing In&out legrest

Cofoe
Stock Symbol: 301087

ELECTRIC WHEELCHAIR

Model: KF-A5

FEATURE	SPECIFICATION
Seat Width	45cm
Material	Aluminum
Motor	LINI Worm great motor Lead-acid 32Ah battery for maximum 25 km
Wheels Size	8*2PU front casters, 12" solid rear wheels
Weight Capacity	135kgs
Max Speed	6km/hour
Carton Size	82*41*80cm



- Flip-up armrest
- Adjustable and detachable footrest
- Half foldable backrest for small transportation
- Chinese Joystick for right or left hand usage
  Electromagnetic brakes guarantees the safe running



Model: KF-A6

FEATURE	SPECIFICATION
Seat Width	45cm
Material	Steel
Motor	250W*2
Wheels Size	8*2PU front casters, 12" solid rear wheels
Weight Capacity	120kgs
Max Speed	6km/hour
Carton Size	74*46*78.5cm

- Flip-up armrest
- Adjustable and detachable footrest
- Half foldable backrest for small transportation
- Chinese Joystick for right or left hand usage
  Electromagnetic brakes guarantees the safe running
- Lead-acid 12Ah battery for maximum 15km

Cofoe
Stock Symbol: 301087

Model: KF-A8

FEATURE	SPECIFICATION
Seat width	48cm
Material	Aluminum
Motor	250w*2
Wheels Size	8*2PU front casters, 12" solid rear wheels
Weight Capacity	135kgs
Max Speed	6km/hour
Packing	1set/CTN
Carton size	71.5*49.5*84cm
G.W.	20AH lithium battery 33.8kg











- Flip-up armrest
- Adjustable and detachable footrest
  Foldable for easy transport and travel
- Equipped with headrest, reclining for more comfort
- Chinese Joystick for right or left hand usage
  Electromagnetic brakes guaranteethe safe running
- Lithium 12Ah battery for maximum 15km

Model: KF-A11

Frame Material	Aluminum Alloy
Motor	Spur gear DC motor
Battery Size	12AH ternary lithium battery
Max. Speed	6 km/h
Driving Distance	20 km
Parking Brake	Electromagnetic brake
Rear Wheel	12 "(330mm)
Front Wheel	8 "(190mm)
Folding Dimension	690*450*770mm
Packaging Dimension	705*465*820mm
N.W./ G.W.	24.8kg/30.2kg lithium battery
Max Loading Capacity	100kgs





Model: KF-A12

Material	Carbon fiber
Controller	Mini brushless controller
Wheel	7 front caster,and 8.5 rear wheel
Motor	Brushless 220W*2pcs
Brake	Automatic electromagnetic brake
Driving Distance	≥20km
Max.Capacity	125kgs
Battery capacity	12AH, or 20AH (lithium battery)
Net weight	12AH(19.3kg), 20AH (20.4kg)
Overall size	925*595*950mm
Foldable size	595*320*700mm

4 MOTORS ELECTRIC BED



- Equipped with 4 motors
- Mounted on 4 swivel castors, 2 with brake.
- Overall Size: 2000×900×470mm
- Max Weight: 240kg
- Packing: 1set/CTN
- Carton size: 2.16*1.22*0.35m
- G.W.: 87KGS



Bed Hi-Lo Adjustment
270~800mm

Back-rest Lifting Angle
0~75°

Knee-rest Lifting Angle
Upward: 0~35°
downward: 0~50°

Trendelenburg & Re. Trendelenburg
0 ~ +10°/-10°

Lateral Tilting & Rotation Angle
0~50°

4 Motors Electric Bed

Model: KD-DHC-J02

- Equipped with 4 motors
- Mounted on 4 swivel castors, 2 with brake.
- Overall Size: 2000×900×470mm
- Max Weight: 240kg
- Packing: 1set/CTN
- Carton size: 2.16*1.22*0.35m
- G.W.: 87KGS





Back-rest Lifting Angle
0~75°±10°

Knee-rest Lifting Angle
Upward: 0~30°±10°
downward: 0~50°±5°

Lateral Tilting & Rotation Angle
0~50°±5°



3 Cranks Manual Bed

Model: KD-BC-CJ11/KD-BC-CJ12

- 3-section frame.
- Mounted on 4 swivel castors, 2 with brake.
- KD-BC-CJ11: with removable guard-rails.
- KD-BC-CJ12: with sliding guard-rails.
- Overall Size: 2090*1050*780mm
- Max Weight: 240kg
- Packing: 1set/CTN
- Carton size: 2.16*1.22*0.35m
- G.W.: 68KGS



Back-rest Lifting Angle
0~80°±5°


Knee-rest Lifting Angle
0-35°±5°

Cofoe
Stock Symbol: 301087

Model: DL01-I



FEATURE	SPECIFICATION
Size	200cm(L) x 90cm(W) x 10cm(H)
Color	Blue
Fabric	Nylon PVC
Feature	22 Air cells
Material Thickness	0.3cm
Max Loading Capacity	135kg
Connecting Pipe Length	120cm
Mattress N.W	3kg
Packing	2pcs/CTN
Carton size	50.6*37*34cm
G.W.	12KGS

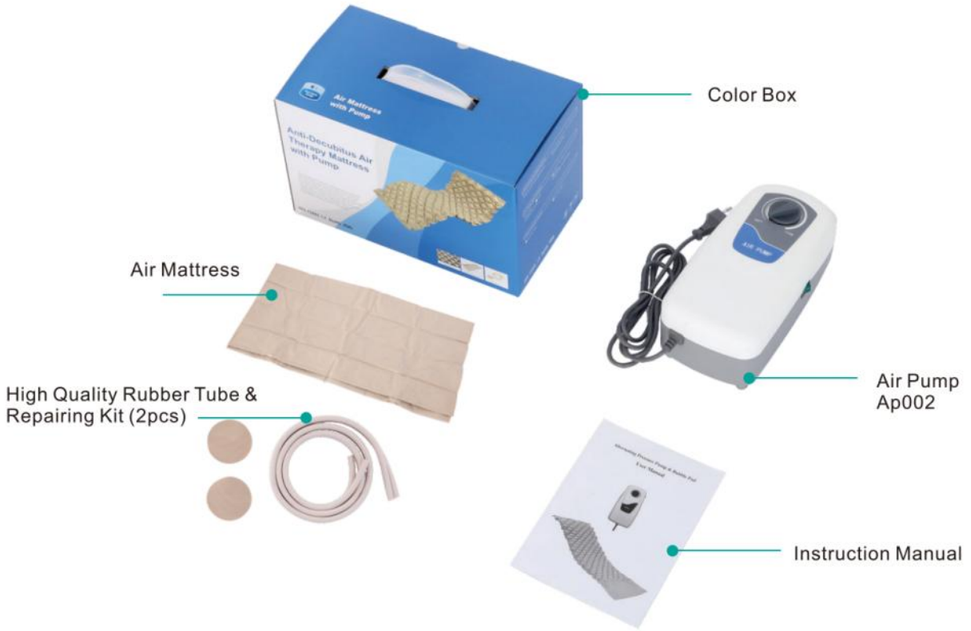

Model: C01-I



Packing: 6pcs/CTN
Carton size: 51.5*30*36.5cm
G.W.: 18.7KGS

FEATURE	SPECIFICATION
Dimension before Inflation	228*97cm
Dimension after Inflation	185-190*90*6.5cm
Folding Dimension	25*15*88cm
Color	Beige
Fabric	Durable medical grade PVC
Feature	130 Spherical bubbles (5 balls per row, 26 rows in total)
Material Thickness	0.03cm
Max Loading Capacity	135kg
Inflatable Connecting Pipe	Length: 120cm ID: 0.5cm OD: 0.85cm
Mattress N.W	1.7kg
Flaps (Optional)	36*88cm (Head / foot side)



Model: AP002

Voltage	220V-240V, 50/60HZ
Air Output	25 L/min
Low Pressure	230mmhg
High Pressure	2100mmhg
Cycle Time	10 mins/12 mins
Power Consumption	Max in 7W
Fuse Tube	1A 250V
Dimension	23cm x 11cm x 9cm
Weight	1KG

Model: AP003

Voltage	220V-240V 50HZ, 110V60HZ
Air Output	≥5L/min
Pressure Range	40mmhg-110mhg
Cycle Time	12mins
Power Consumption	Max in 7W
Fuse Tube	1A 250V
Dimension	20*10*9cm
Weight	0.8kg



Cofoe
Stock Symbol: 301087

CANE

Model: KFSZ005

FEATURE	SPECIFICATION
Height Range	81-89cm
Material	Aluminium alloy, NRB
Color	Silvery
Function	Help walking and more stable
Type	The height is 10 gear adjustable
Net Weight	0.73kgs/pcs
Load-bearing	120kgs
Tube Thickness	1.2mm
Packing	20pcs/CTN
Carton size	63*17*25cm
G.W.	8.8KGS





Model: KFSZ010

FEATURE	SPECIFICATION
Height Range	71-95cm
Material	Aluminium alloy, NRB
Color	Silvery
Function	Help walking and more stable
Type	The height is 10 gear adjustable
Net Weight	0.73kgs/pcs
Load-bearing	120kgs
Tube Thickness	1.2mm
Packing	10pcs/CTN
Carton size	79*253*45cm
G.W.	9KGS


WALKER

Model: KFZX610

FEATURE	SPECIFICATION
Material	Aluminum Tube
Width/Height	50-75cm
Adjustment Range	75-93cm
Net Weight	2.5kgs
Packing	Cartons
Type	No Wheels
Applicable Scope	Suitable for people with disabilities, mobility, rehabilitation etc
Capacity	100kgs
Product Performance	8-speed adjustable height
Packing	1pcs/CTN
Carton size	53*9*78cm
G.W.	9KGS









Model: KFZXJ002

FEATURE	SPECIFICATION
Material	Aluminum
N.W.	6.8KG
Dimension	62*47*91.5cm
Carton Dimension	61*22*83cm
Front/Rear Wheel	8"


Foldable


Height Adjustable



New Braking System



OSTOMY BAG





Velcro



Extended Tape Border Baseplate



Inspection Window



Soft and Silent Pouch Film

Cofoe
Stock Symbol: 301087
Stock Symbol: 301087

One-piece Ostomy Bag



Model: 4005C

- High quality EVOH pouch film
- One-sided light weight non-woven cover
- Carbon filter to avoid odor transmission
- Cut-to-Fit Range: 15~60mm



Model: 6008CV

- Soft and silent pouch film material
- Extended tape border baseplate
- Two-sided light weight non-woven cover
- Inspection window to check contents easiler
- Carbon filter to avoid odor transmission
- Velcro sealing type
- Cut-to-Fit Range: 15~60mm



Model: 5015CV

- High quality EVOH pouch film.
- Extended tape border baseplate
- Inspection window to check contents easiler
- Two-sided light weight non-woven cover
- New generation vent-hole design
- Cut-to-Fit Range: 15~60mm



Model: 4002C

- High quality EVOH pouch film.
- Hydrocolloid skin barrier to care ostomy skin.
- One-sided light weight non-woven cover.
- Carbon filter to avoid odor transmission.
- Pouch film color is optional.
- Cut-to-Fit Range: 15~60mm



Model: 6038 (Urostomy Bag)

- High quality EVOH pouch film
- Two-sided light weight non-woven cover
- Extended tape border baseplate
- Inspection window to check contents easiler
- Cut-to-Fit Range: 15~60mm

Cofoe
Stock Symbol: 301087

Embedded System Two-piece Ostomy Bag



Ostomy Pouch

- Closed-end Type
- High quality EVOH pouch film.
- Embedded System make it easy to operate.
- One-sided light weight non-woven cover.
- Carbon filter to avoid odor transmission.
- Pouch film color is optional.
- **4018 Compatible Baseplate 4033, 4028, 4029**
- **4019 Compatible Baseplate 4030, 4031**

Model	Flange Size
4018C	57mm
4019C	70mm



Ostomy Pouch

- Drainable Type
- High quality EVOH pouch film.
- Embedded System make it easy to operate.
- Two-sided light weight non-woven cover.
- Inspection window to check contents easiler.
- Carbon filter to avoid odor transmission.
- Pouch film color is optional.
- **4022 Compatible Baseplate 4033, 4028, 4029**
- **4024 Compatible Baseplate 4030, 4031**

Model	Flange Size
4022C	57mm
4024C	70mm



Flat Baseplate

- Sturdy PE flange ring with Embedded System.
- Hydrocolloid flat skin barrier with foam layer.
- Extend tape border baseplate attached firmly.

Model	Cut-to-Fit Range
4033	15-45mm
4028	15-57mm
4030	15-70mm



Convex Baseplate

- Medical hydrocolloid avoid sensitivity.
- Sturdy PE flange with Embedded System.
- Flexible adhesive baseplate to avoid leakage.


Model	Cut-to-Fit Range
4029	15-45mm
4031	15-60mm



Ostomy Pouch

- High quality EVOH pouch film.
- Embedded System make it easy to operate.
- Two-sided light weight non-woven cover.
- Inspection window to check contents easiler.
- Carbon filter to avoid odor transmission.
- Pouch film color is optional.
- **Compatible Baseplate 4034**

Model	Flange Size
4021CV	60mm



Flat Baseplate

- Sturdy PE flange ring with Embedded System.
- Hydrocolloid flat skin barrier with foam layer.
- Extend tape border baseplate attached firmly.

Model	Cut-to-Fit Range
4034	15-60mm

Mechanical Lock System Two-piece Ostomy Bag



Model: 4025CV

- Soft and silent pouch film material
- Sturdy PE flange
- Mechanical lock system to make it realiable.
- Two-sided light weight non-woven cover.
- Inspection window to check contents easiler.
- Carbon filter to avoid odor transmission
- **Compatible Baseplate 4032**

Model	Flange Size
4025CV	60mm



Model: 4032

- Medical hydrocolloid avoid sensitivity
- Sturdy PE Mechanical lock system flange
- Flexible adhesive baseplate to avoid leakage

Model	Cut-to-Fit Range
4032	15-55mm

Mechanical Lock System Two-piece Ostomy Bag



Model: 4016C

- High quality EVOH pouch film.
- Sturdy PE flange.
- Mechanical lock system to make it realiable.
- One-sided light weight non-woven cover.
- Carbon filter to avoid odor transmission.
- **Compatible Baseplate 4026, 4027**

Model	Flange Size
4016C	60mm



Model: 4023CV

- High quality EVOH pouch film.
- Sturdy PE flange.
- Mechanical lock system to make it realiable.
- One-sided light weight non-woven cover .
- Carbon filter to avoid odor transmission.
- **Compatible Baseplate 4026, 4027**

Model	Flange Size
4023CV	60mm



Model: 4026 Flat Baseplate

- Medical hydrocolloid avoid sensitivity.
- Sturdy PE Mechanical lock system flange.
- Flexible adhesive baseplate to avoid leakage.

Model	Flange Size
4026	15-55mm



Model: 4027 Convex Baseplate

- Medical hydrocolloid avoid sensitivity.
- Sturdy PE Mechanical lock system flange.
- Flexible adhesive baseplate to avoid leakage.

Model	Cut-to-Fit Range
4027	15-45mm

Cofoe
Stock Symbol: 301087

Ostomy Care Accessories



Skin Barrier Spray

- Specification: 50ml
- No Sting, alcohol-free spray that provides a transparent protective coating onto the area sprayed.
- Increase adhesion of tapes and wafers, gentle, convenient and scent-free.



Adhesive Remover

- Specification: 50ml
- Alcohol-free spray
- Sting-free

  Easily remove your barrier and leftover residue.



Skin Barrier Powder

- Specification: 25g
- Convenient puff bottle
- Absorbs moisture from broken skin around the stoma, which allows for better barrier adhesion to help protect the skin.



Ostomy Paste

- Specification: 60g
- Skin friendly.
- Sting-free protection against leakage.
- Fills folds and creases to maintain a tight fit between the stoma and the ostomy barriers to reduce leakage.



Skin Barrier Wipe

- Specification: 50pcs/bag
- Sting-free
- Provides a breathable film onto stoma, which reduces skin problems associated with output and adhesives.



Ostomy Belt

- Increases additional security to hold stoma bag in place.
- Dimension:

  S: 14*85.7cm

  M: 14*95.5cm

  L: 14*104cm



Model: 402F
Thickness: 2mm




Model: 402K
Thickness: 4mm

Barrier Ring


Fill in uneven skin contours near the stoma to create a flatter surface to prevent ostomy leakage.

Cofoe Baseplate Features

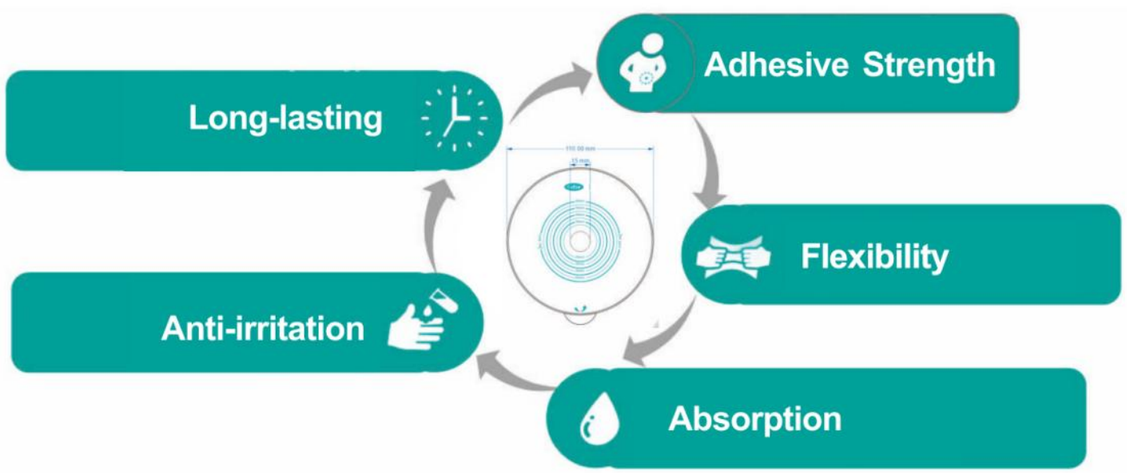

Operation Steps



Cleaning the skin around the stoma with a soft wipe


Measuring the stoma aperture



Cutting the stoma aperture to the correct size


Removing the protective cover from the flange


Position hole in flange


Pouch attached


One-Piece Ostomy Bag Selection

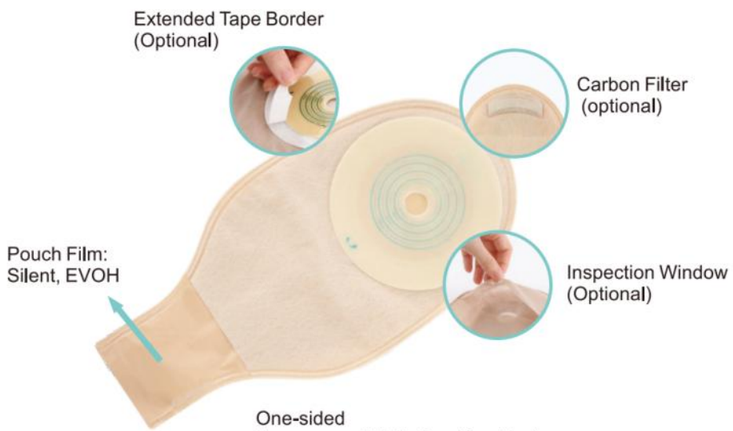

Sealing Type


Tail Clip | Wire Tie | Velcro

Two-Piece Ostomy Bag Selection

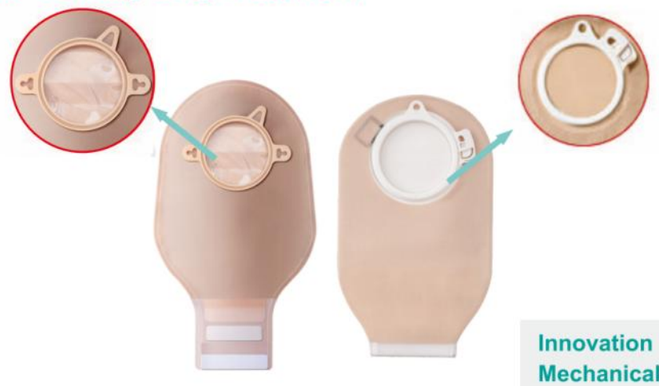

Classic Design Embedded System

- 57mm, 60mm, 70mm.
- More models to satisfy more target markets.
- More economical and durable.

Innovation Design Mechanical Lock System

- Only match 60mm.
- Mechanical lock make the them more trustworthy and anti-leakage.

Cofoe
Stock Symbol: 301087

Choose Your Optimal Ostomy Bag

Feature / Model	Type	Pouch Film		Extended Tape Border	Inspection Window	Non-woven Fabric Material		Non-woven Fabric	
		EVOH	Silent			Light Weight	Spunlace	One-sided	Double-sided
4005	One piece ostomy bag (Drainable)	✓				✓		✓	
5005	One piece ostomy bag (Drainable)		✓			✓		✓	
4006	One piece ostomy bag (Drainable)	✓			✓	✓			✓
5006	One piece ostomy bag (Drainable)		✓		✓	✓			✓
6005	One piece ostomy bag (Drainable)	✓		✓		✓		✓	
6006	One piece ostomy bag (Drainable)	✓		✓	✓	✓			✓
6007	One piece ostomy bag (Drainable)		✓	✓		✓		✓	
6008	One piece ostomy bag (Drainable)		✓	✓	✓	✓			✓
4010	One piece ostomy bag (Drainable)	✓			✓		✓		✓
5010	One piece ostomy bag (Drainable)		✓		✓		✓		✓
4011	One piece ostomy bag (Drainable)	✓					✓	✓	
5011	One piece ostomy bag (Drainable)		✓				✓	✓	
6010	One piece ostomy bag (Drainable)	✓		✓	✓		✓		✓
6011	One piece ostomy bag (Drainable)	✓		✓			✓	✓	
6012	One piece ostomy bag (Drainable)		✓	✓	✓		✓		✓
6013	One piece ostomy bag (Drainable)		✓	✓			✓	✓	

Note:
1. The model ended with "C": + Carbon filter
2. Sealing Type: Tail clip, wire tie, velcro
Ordinary sealing type is tail clip. The model No. With "T" means wire tie, with "V" means velcro

Cofoe
Stock Symbol: 301087

ADULT DIAPER




PRODUCT PARAMETERS

Product Name	Adult Diapers		
Size	M	L	XL
Specification	650*800mm	750*900mm	800*1000mm
SAP	12	15	15
Absorbency	1000ml	1200ml	1400ml
Package	10pcs/bag,12bag/CTN	10pcs/bag,12bag/CTN	10pcs/bag,12bag/CTN
Carton size	565*545*440mm	565*545*485mm	575*550*520mm
G.W.	14KGS	16KGS	16.5KGS


6-Layer Integrated Core

Strong water retention, lighter, no lumping, no breakage

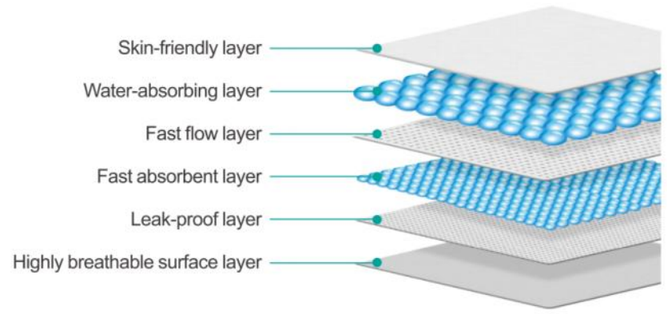

How to Use Cofoe Adult Diaper



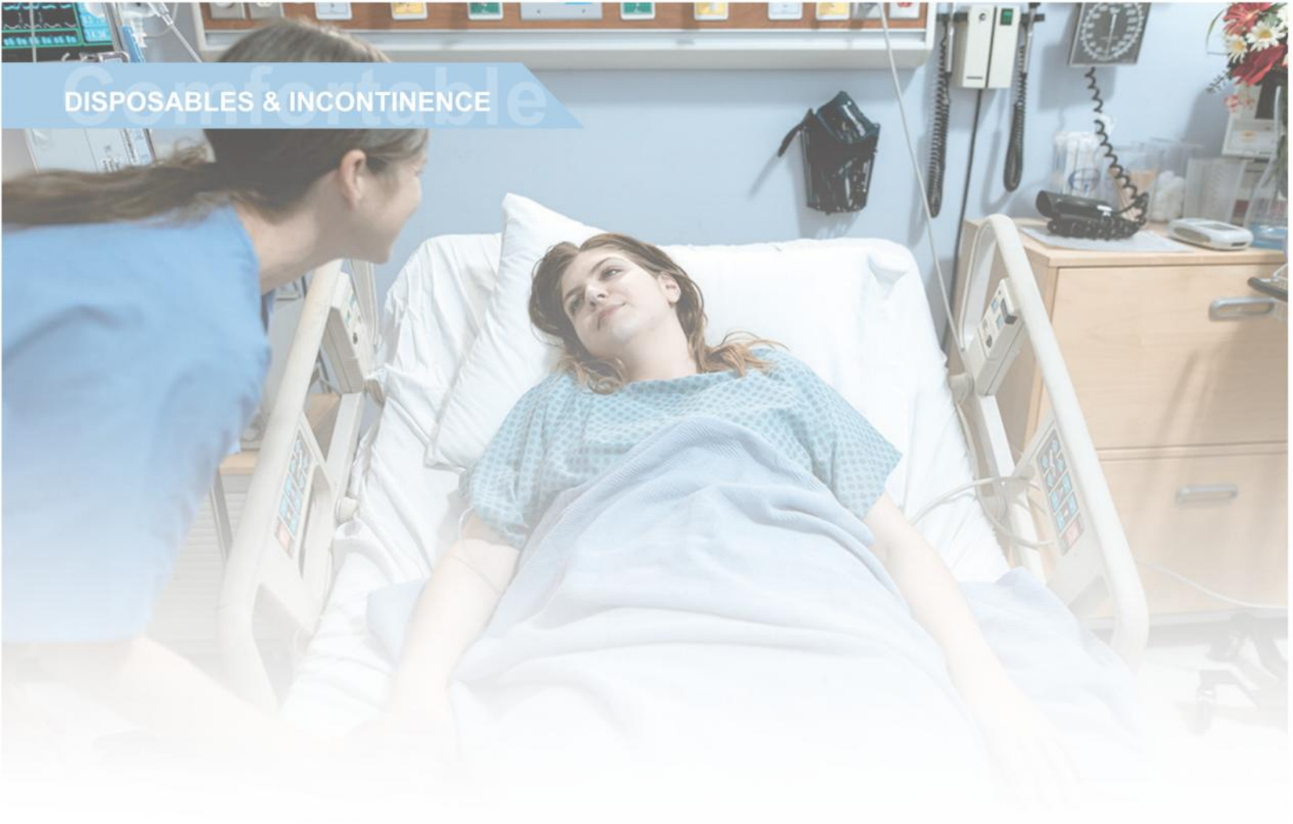

Cofoe

Stock Symbol: 301087

PRODUCT PARAMETERS	
Specification	**Type A:** 600*600mm **Type B:** 600*900mm
Color	Blue
Material	Double-layer PE film
Composition	Composed of nonwoven fabric, paper, and plastic film
Performance	Soft, non-irritating and hygienic, disposable
Characteristics	1-Medical standard production, individual packaging, ethylene oxide sterilization. 2- Breathable and durable, soft and skin-friendly. 3-Double PE film, waterproof and oil-proof
Warranty	Sterility valid for 3 years

UNDERPADS


Waterproof and Oilproof

Epoxy Sterilization

Breathable and Durable

Soft and Skin-friendly





Bi-layer PE Film

Waterproof, oil-proof and impermeable

Wear-resistant and Tear-resistant

Skin-friendly and durable





Breathable and Non-stuffy

High quality non-woven fabric